

About F.Port 2.0:

Working with the F.Port 2.0 protocol, the telemetry data (like real-time current and voltage) of Xact servos can be achieved and transmitted back to the radio by connecting either F.Port 2.0 capable receiver or flight controller. All the preset servo options of speed and torque can be configured directly on an ACCESS radio through the host device of F.Port 2.0 line, and the configurable servo steering as well as travel degree are additions now can be expected on this series.

Features

- Digital High Resolution Magnetic Sensor *
- Full Metal Gears
- All Aluminum Housing by CNC
- Programmable by F.Port 2.0/Telemetry by F.Port 2.0
- Firmware Update
- 4.8-8.4V Supported
- Operating travel: 360°

* About the shell color, please refer to the actual product.



RoHS CE

86-510-8518 7718

frsky@frsky-rc.com

www.frsky-rc.com

F-4, Building C, Zhongxiu Technology Park, No.3

Yuanxi Road, Wuxi, 214125, Jiangsu, China

More information:




Xact

Series Servo

Dynamic Integrated Performance

FrSky Electronic Co., Ltd.

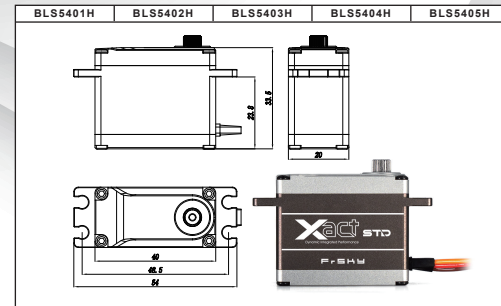

Specifications

	Weight (g)	Size (mm)	Torque (kgf cm) ±15%	Speed (S/60°) ±12%	Voltage (V)
BLS5401H	77.5	40*20*33.5	22.8	0.03	8.4
			20.0	0.04	7.0
			17.2	0.05	6.0
BLS5402H	77.5	40*20*33.5	38.3	0.05	8.4
			34.4	0.06	7.0
			28.0	0.07	6.0
BLS5403H	77.5	40*20*33.5	48.9	0.08	8.4
			43.0	0.09	7.0
			35.5	0.11	6.0
BLS5404H	77.5	40*20*33.5	50.9	0.11	8.4
			47.2	0.12	7.0
			43.6	0.15	6.0
BLS5405H	77.5	40*20*33.5	54.9	0.12	8.4
			52.9	0.14	7.0
			46.3	0.17	6.0

• Dimensions: 40*20*33.5mm (L*W*H)

• Weight: 77.5g

• Motor Type: Brushless

• Servo Horn Spline: Φ6 25T

• Stall Current: 6.5A@6.0V / 8.0A@7.0V / 9.1A@8.4V

• Operating Voltage Range: 4.8-8.4V

• Max Refresh Rate: 333Hz